

GSTIN : 22AUFP8634F1Z1



AMAR JYOTI MACHINERY

AMAR JYOTI

MACHINERY CORPORATION



4, MAIN BILASPUR ROAD, BHANPURI CHOWK, BHANPURI, RAIPUR-493221, CHHATTISGARH (IND)

Mo.: +91-9522015586; +91-9522015584

INDUSTRIAL MACHINERY

Visit At: WWW.AMARJYOTIMACHINERY.COM Email : raipur.amarjyoti@gmail.com



RADIAL DRILL

AUTO LIFT AND AUTO FEED

25MM TO 75MM

Model	RDA25	RDA32	RDA40	RDA50L	RDA50	RDA65	RDA75
Drill Head							
Drilling capacity	25 mm	32 mm	40 mm	50 mm	50 mm	60 mm	75 mm
Drilling Depth	140 mm	140 mm	200 mm	200 mm	250 mm	250 mm	325
Taper Spindle Nose	MT - 3	MT -3	MT 4	MT - 4	MT- 4	MT- 5	MT- 5
No. of Spindle Speed	6 No.	6 No.	6 No.	6 No.	6 No.	6 No.	6 No.
Spindle speeds range	45-750 RPM	45-750 RPM	45 – 750 RPM	45-750 RPM	45-650 RPM	45-550 RPM	45-550 RPM
No of Spindle feed	2 (0.1 to 0.2)	2 (0.1 to 0.2)	3 (0.1 to 0.2)	3(0.1 to 0.2)	3 (0.1 to 0.2)	3 (0.1 to 0.2)	6 (0.125 to 125)
Drill Power	1HP	1.5HP	2HP	2HP	2HP	3HP	5HP
Capacity							
Drilling Radius Max.	600 mm	700 mm	900 mm	900 mm	1100 mm	1300 mm	1700 mm
Drilling Radius Min.	200 mm	300 mm	325 mm	325 mm	425 mm	425 mm	500 mm
Drilling Head Traverse	300 mm	300 mm	500 mm	500 mm	600 mm	750 mm	1200 mm
Diameter of Column sleeve	177 mm	177 mm	230 mm	230 mm	250 mm	310 mm	355 mm
Arm Elevator Motor	0.5HP	0.5HP	1HP	1HP	1HP	1.5HP	2HP
Dimension of Base							
Distance Base Plate to Spindle Max.	750 mm	800 mm	950 mm	950 mm	1200 mm	1400 mm	1650 mm
Distance Base Plate to Spindle Min.	200 mm	225 mm	225 mm	225 mm	225 mm	300 mm	400 mm
Dimensions of Base Plate	1000x625x125	1000x630x125	1350 x 700x 170	1350 x 700 x 170	1500 x 750x 170	1700 x 850x 190	2600 x 1150x 250
Weight Approx.	800 K.G	1000 K.G	1300 K.G	1350 K.G	1700 K.G	2300 K.G	4500 K.G



RADIAL SIMPLE




RADIAL MOTOR LIFT




RADIAL MOTOR LIFT HEAVY



RADIAL AUTO FEED AND AUTO LIFT

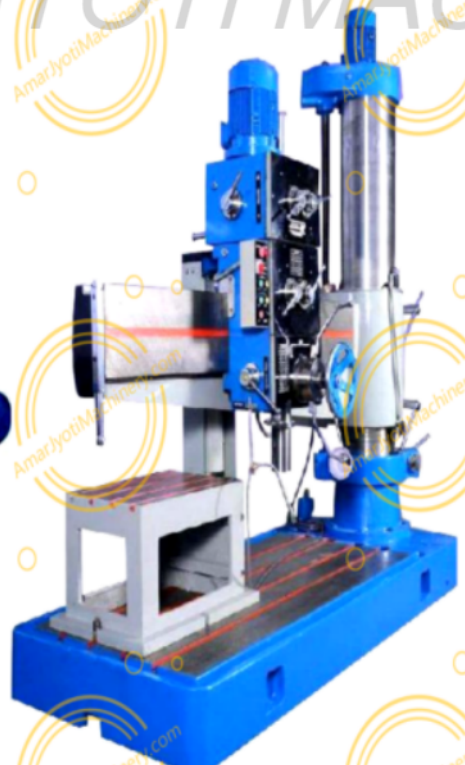

RADIAL ALL GEARED HEAVY

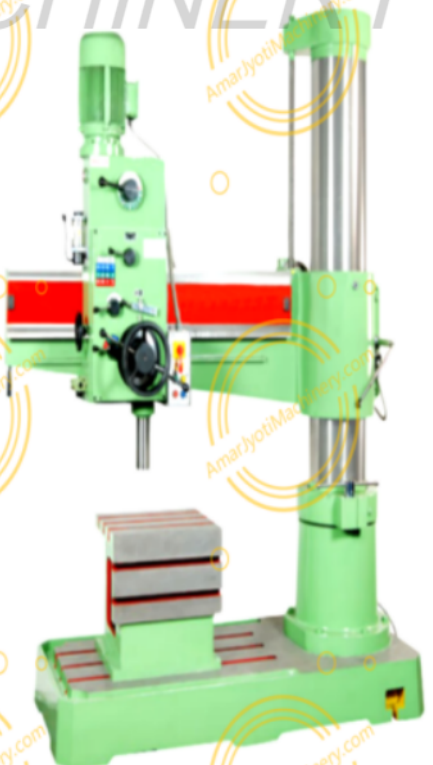

RADIAL ALL GEARED